

DS-2CD7133-E VGA Mini Dome Network Camera




- Real time video at VGA(640×480)
- H.264 video compression with high compression ratio
- PoE
- IP66
- Conforms to ONVIF and PSIA

Outdoor



Unit: mm

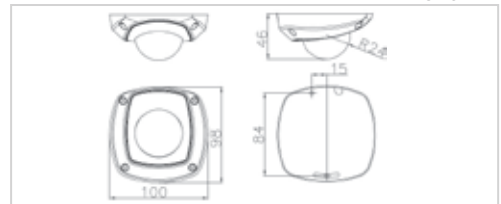

Specifications

| | | |
|----------------------|-------------------------|--|
| | | DS-2CD7133-E |
| Camera | Image Sensor | 1/4" Progressive Scan CMOS |
| | Min. Illumination | 0.01 Lux @ (F1.2, AGC ON), 0.02 Lux @ (F1.8, AGC ON) |
| | Shutter Time | 1/25 s to 1/100,000 s |
| | Lens | 2.8 mm @ F1.8, 4 mm @ F1.8 Angle of view: 55° (4 mm) |
| | Lens Mount | M12 |
| | Angle Adjustment | Pan: ± 15°, Tilt: 0 - 90°, Rotation: ± 15° |
| | Day & Night | Electronic |
| Compression Standard | Video Compression | H.264 / MPEG4 / MJPEG |
| | Bit Rate | 32 Kbps - 8 Mbps |
| | Dual Stream | Yes |
| Image | Max. Image Resolution | 640 × 480 |
| | Frame Rate | 30 fps (640 × 480) |
| | Image Setting | Saturation, Brightness, Contrast adjustable through client software or web browser |
| Interface | Alarm Trigger | Motion detection |
| | Protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP |
| | Security | Password protection, Watermark |
| | System Compatibility | ONVIF, PSIA, CGI |
| | Communication Interface | 1 RJ45 10 M/100 M Ethernet port |
| | Reset Button | Yes |
| | Operating Conditions | -10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing) |
| General | Power Supply | 12 V DC ± 10% PoE (802.3af) |
| | Power Consumption | Max. 4 W |
| | Impact Protection | IEC60068-275Eh, 50J; EN50102, up to IK10 |
| | Weather Proof Rating | IP66 |
| | Dimension (WxHxD) | 99.9 × 97.5 × 46.5 mm (3.93" × 3.84" × 1.83") |
| | Weight | 250 g (0.55 lbs) |

Accessories



DS-1234ZJ
Single Gang Electrical Box Adapter